

Geolite Magma Xenon & Steel Fiber

Mineral geo-mortar with geo-binder base and straight steel fibres for FRC monolithic strengthening of reinforced concrete.

Geolite Magma Xenon & Steel Fiber is a FRC system consisting of a high ductility, certified, fibre-reinforced, pourable geo-mortar for passivating, repairing and consolidating reinforced concrete structures.



1. C.V.T. certified, pourable FRC system
2. It does not need additional rebars
3. Thicknesses from minimum 15 mm
4. Based on geo-binder
5. For high ductility monolithic strengthening

Areas of application

→ Use

High ductility, ultra-high performance, fibre-reinforced, pourable, C.V.T.-certified Geolite FRC mortar, for the repair and strengthening of structural elements, by means of low thickness interventions without the use of additional rebars.

Passivation, restoration and monolithic consolidation of reinforced concrete structures and infrastructures:

- by the formwork casting of concrete for vertical structures and at the soffit of horizontal elements;

- by pouring onto the top surface of horizontal elements or by bonded section underpinning in general.

Precision fastening and structural anchoring of sub-plates, tie-rods, bars, plates, machinery on reinforced concrete.

Instructions for use

→ Preparation of substrates

Before applying the Geolite FRC system it is necessary to:

- thoroughly remove all weakened concrete until a solid, resistant substrate is obtained; roughen it by mechanical scarification or hydro-demolition to a depth of ≥ 5 mm, equivalent to level 9 of the Test kit for preparation of reinforced concrete and masonry substrates;
- remove the rust from the reinforcing bars, which must be cleaned by brushing (manual or mechanical) or sandblasting;
- clean the treated substrate using compressed air or a high pressure washer;
- saturate with water until the substrate is saturated yet with no excess water on the surface. Alternatively on horizontal concrete surfaces, apply Primer Uni on a dry substrate in order to ensure regular absorption and promote the natural crystallisation of the geomortar.
- apply Epobinder on a dry substrate to obtain a chemical-type anchoring; alternatively, use shear connectors for mechanical anchoring from the Steel Connect range.

Check that the resistance class of the supporting concrete is suitable.

→ Dosage

Geolite Magma Xenon & Steel Fiber: add the fibres in the amount of 6.5% of the weight of the powder (1.66% by volume, 1 packaging of fibres every 4 bags of powder).

→ Preparation

The mixture can be prepared in:

- cement mixer;
- planetary mixer;
- a mortar mixer or drill-type mixing device with a low-rev agitator.

Mix the powder using the quantity of water shown on the package for approximately 6 minutes until a smooth and lump-free mortar is obtained; then add the fibres (while keeping the percentage unchanged) and further mix for approximately 2 minutes in order to ensure perfect distribution of the fibres inside the binder matrix.

→ Application

Apply the Geolite FRC system by pouring or pumping it on the extrados of horizontal surfaces or in sealed formworks treated with a parting compound that assists air escape, using the correct application techniques.

Application thicknesses shall not be less than 15 mm.

For mechanized applications it is recommended to use a continuous cycle pump equipped with a stator suitable for the maximum grain size of the product (1.5 mm) and the steel fibres size (13 mm).

Allow the surfaces to cure for at least 48 hrs. Cover with a waterproof sheet for the next 5 days.


→ Acceptance tests

Take at least two samples every 100 m³ of concrete, to be subjected to flexural testing in accordance with standard EN 14651. For further details, refer to the FRC system qualification guidelines in paragraph 5.1..

→ Cleaning

Residual traces of the product can be removed from tools and machines using water before the product hardens.

Certificates and marks

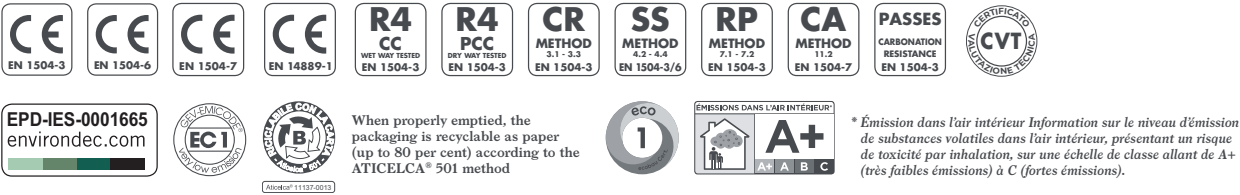

Abstract

Geolite FRC system – Geolite Magma Xenon & Steel Fiber: supply and laying of repair and structural strengthening of reinforced concrete using a high ductility, ultra-high performance, pourable, fibre-reinforced mortar, FRC (Fibre Reinforced Concrete), created with steel fibres obtained by cold drawing of high-performance and high carbon content wire, such as Steel Fiber, by Kerakoll Spa, CE-marked and compliant with the performance requirements of Standard EN 14889-1, immersed in a certified, pourable, normal-setting, mineral geo-mortar with a geo-binder base, with very low petrochemical polymer content and free of organic fibres, specific for the passivation, repair and guaranteed, long-lasting monolithic strengthening of concrete structures and the anchoring of metal elements, such as Geolite Magma Xenon by Kerakoll Spa, CE-marked and compliant with the performance requirements of Standards EN 1504-7 for the passivation of reinforcing bars, EN 1504-3, Class R4, CC and PCC type, for volumetric reconstruction and strengthening and EN 1504-6 for anchoring, according to Principles 3, 4, 7 and 11 defined by EN 1504-9. C.V.T. certified mechanical characteristics: compressive strength C80/95 (EN 12390-3); modulus of elasticity under compression 43.41 GPa (NTC 2018); tensile strength 7.40 MPa (average value, CNR DT 204); tenacity class 8b, $f_{R,1k} = 9.54$ MPa, $f_{R,2k} = 8.83$ MPa, $f_{R,3k} = 7.33$ MPa and $f_{R,4k} = 6.10$ MPa (typical values, EN 14651).

Geolite Magma Xenon - Technical Data compliant with Kerakoll Quality Standard		
Appearance	Powder	
Apparent volumetric mass	≈ 1250 kg/m³	UEAtc
Aggregate mineral content	silicate - carbonate	
Grading	0 – 1.5 mm	EN 12192-1
Shelf life	≈ 12 months from production in the original sealed packaging, protect from humidity	
Pack	25 kg bags	
Mixing water:		
- into the cement mixer	≈ 3.3 l / 1 bag 25 kg	
- manual and mechanical mixing	≈ 3.1 l / 1 bag 25 kg	
Mixture spread	215 mm with no shaker table vibration	EN 13395-1
Density of the mixture	≈ 2270 kg/m³	
pH of the mixture	≥ 12,5	
Pot life	≥ 60 min. (at + 21 °C)	
Start/End of setting	> 360 min.	
Temperature range for application	from +5 °C to +40 °C	
Minimum thickness	15 mm	

Values taken at +21 °C, 60% R.H. and no ventilation. Data may vary depending on specific conditions at the building site.

Steel Fiber - Technical Data compliant with Kerakoll Quality Standard			
Shape		shiny straight rigid fibres	
Nature of material		cold drawn steel with a high carbon content	
Density of the material	ρ_f	7.85 g/cm³	EN 14889
Fibre length	l_f	13 mm	EN 14889
Fibre diameter	d_f	0.20 mm	EN 14889
Form ratio		65	EN 14889
Shelf life		unlimited	
Pack		6.5 kg boxes	
Number of fibres per kg		≈ 314.000	
Dosage		1 pack of Steel Fiber every 4 bags of Geolite Magma Xenon	(6.5% of the weight of the powder)
Geolite Magma Xenon & Steel Fiber			
Geolite FRC system consumption		≈ 21 kg/m² per cm of thickness	

Geolite Magma Xenon - Performance			
VOC Indoor Air Quality (IAQ) - Volatile organic compound emissions			
Conformity	EC 1 plus GEV-Emicode		GEV certified 10894/11.01.02
HIGH-TECH			
Performance characteristic	Test Method	Requirements of standard EN 1504-7	Performance
Corrosion protection	EN 15183	no corrosion	value exceeded
Shear adhesion	EN 15184	≥ 80% of the value of the uncovered bar	value exceeded

Geolite Magma Xenon - Performance			
	Test Method	Requirements of standard EN 1504-3, class R4	Performance in CC and PCC conditions
Compressive strength (N/mm²):	EN 12190		
- 24 hrs			> 70
- 7 days			> 85
- 28 days		≥ 45	> 110
Flexural tensile strength (N/mm²):	EN 196-1	None	
- 24 hrs			> 8
- 7 days			> 10
- 28 days			> 14
Adhesive bond	EN 1542	≥ 2 N/mm² (28 days)	> 2 N/mm² (28 days)
Resistance to carbonation	EN 13295	dk ≤ reference concrete [MC (0.45)]	value exceeded
Modulus of elasticity under compression:	EN 13412	≥ 20 GPa (28 days)	
- in CC			34 GPa
- in PCC			33 GPa
Capillary absorption	EN 13057	≤ 0.5 kg·m ⁻² ·h ^{-0,5}	< 0.5 kg·m ⁻² ·h ^{-0,5}
Chloride ion content (determined on the product in powder form)	EN 1015-17	≤ 0.05%	< 0.05%
Reaction to fire	EN 13501-1	Euroclass	A1
	Test Method	Requirements of standard EN 1504-6	Performance
Pull-out strength of steel rebars (movement in mm in relation to a 75 kN load)	EN 1881	≤ 0.6 mm	< 0.6 mm
Chloride ion content (determined on the product in powder form)	EN 1015-17	≤ 0.05%	< 0.05%
Hazardous substances		compliant with point 5.4	
	Test Method	Requirements of standard	Performance
Embedded bar adhesive tension	RILEM-CEB-FIPRC6-78	None	> 25 N/mm²
Resistance to severe chemical attacks (group 3: unused heating oil, diesel oil and oils for engine and gear)	EN 13529	analysis of damage and bond strength ≥ 2 N/mm²	no deterioration and bond strengths > 2 N/mm²
Water-resistance	EN 12390-8	None	0 mm
Aggregate performance characteristic	Test Method	Requirements of standard UNI 8520-22	Aggregate performance
Alkali-aggregates reaction	UNI 11504	reactivity class	NR (non-reactive)
Temperature range (air and surface)			from -20 °C to +100 °C
Relative humidity (air and substrate)			irrelevant

Steel Fiber - Performance			
HIGH-TECH			
Tensile strength	f_{ft}	$\geq 3100 \text{ MPa}$	EN 14889
Elastic modulus	E_f	$\geq 200 \text{ GPa}$	EN 14889
Elongation at break	A_{ft}	$> 1\%$	EN 14889
Performance - Geolite FRC System – Geolite Magma Xenon & Steel Fiber (in accordance with CVT, Certificato di Valutazione Tecnica/Technical Assessment Certificate, no. 466/2025)			
Performance characteristic	Test Method		Performance
Density (product when hard)	EN 12390-7		2250 kg/m ³
Compressive strength (characteristic value)	EN 12390-3		Rck = 106.50 N/mm ² C80/95
Modulus of elasticity under compression	NTC 2018		43,41 GPa
Poisson coefficient	NTC 2018		0 – 0.2
Coefficient of linear thermal expansion	NTC 2018		10·10 ⁻⁶ °C ⁻¹
Residual flexural strength (characteristic value)	EN 14651		fR,1k = 9.54 N/mm ²
			fR,2k = 8,83 N/mm ²
			fR,3k = 7.33 N/mm ²
			fR,4k = 6.10 N/mm ²
			fR,3k/ fR,1k = 0.768
Resistance to proportionality limit (average and characteristic value)	EN 14651		ffct,L = 6.95 N/mm ²
			ffct,Lk = 5.91 N/mm ²
Tenacity class	EN 14651		8b
Tensile strength (average value)	CNR DT 204		fFts = 7.40 N/mm ²
	EN 206		X0
Exposure classes			XC1, XC2, XC3, XC4
			XD1, XD2, XD3
			XS1, XS2, XS3
			XF1, XF2, XF3, XF4
			XA1
Freeze/thaw resistance (after 20 cycles)	Guidelines		98% (fR,1)
			101% (fR,3)

Performance - Geolite FRC System – Geolite Magma Xenon & Steel Fiber (in accordance with CVT, Certificato di Valutazione Tecnica/Technical Assessment Certificate, no. 466/2025)		
Performance characteristic	Test Method	Performance
Resistance to high temperatures (+100 °C)	Guidelines	99% ($f_{R,1}$)
		101% ($f_{R,3}$)
Water-resistance	EN 13529	0 mm
Reaction to fire	EN 13501-1	class A1
Installation conditions		
Temperature range (air and surface)		from +5 °C to +40 °C
Relative humidity (air and substrate)		irrelevant
Service conditions		
Temperature range (air and surface)		from -20 °C to +100 °C
Relative humidity (air and substrate)		irrelevant

Warning

- abide by any standards and national regulations

→ store the product away from any sources of humidity and out of direct sunlight

→ use at temperatures between +5 °C and +40 °C

→ do not add binders or additives to the mixture

→ do not apply to dirty, loose and flaking surfaces

→ following application, protect from direct sunlight and wind
- allow the product to cure during the first 48 hours

→ if necessary, ask for the safety data sheet

→ when laying on gypsum, metal or timber, contact Kerakoll Worldwide Global Service

→ for any other issues, contact Kerakoll Technical Customer Service: + 39 0536.811.516 www.kerakoll.com/contatti



This information was last updated in November 2025; please note that additions and/or amendments may be made over time by KERAKOLL SpA; for the latest version, see www.kerakoll.com. KERAKOLL SpA shall therefore be liable for the validity, accuracy and updating of information provided only when taken directly from its institutional website. The technical data sheet given here is based on our technical and practical knowledge. As it is not possible for us to directly check the conditions of your building site and the execution of the work, this information represents general indications that do not bind Kerakoll in any way. Therefore, it is advisable to perform a preliminary test to verify the suitability of the product for your purposes.